


Mobius 5-Bay Fan Replacement Procedure


1. Remove the 6 screws on the back of the unit.




2. Turn unit over and remove the 5 screws on the bottom of the unit.

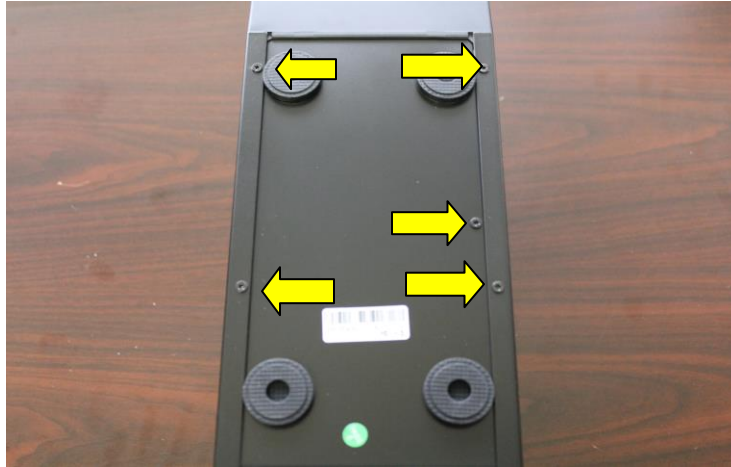

3. Slide the outer shell off.

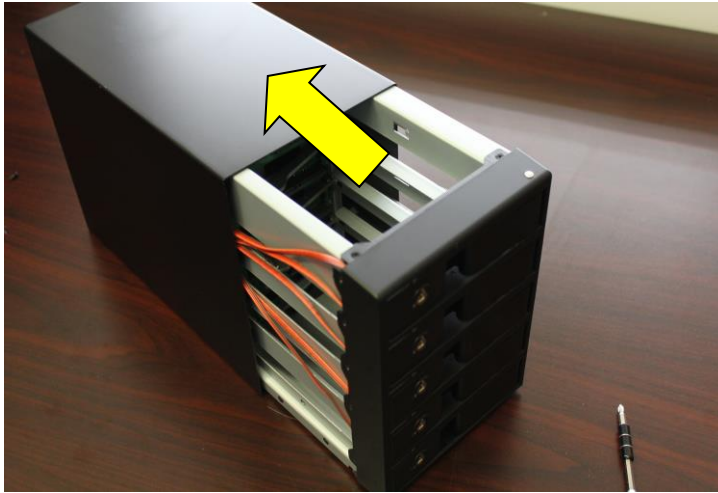


4. Turn the Mobius upside down. There is a screw under 3 of the 4 feet; remove all of these screws.

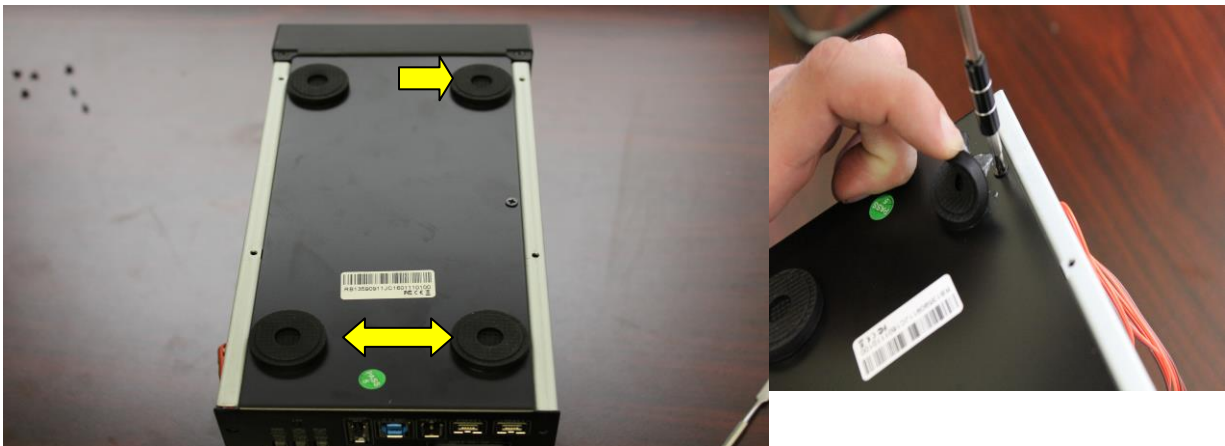


*Do not completely pull off the feet. Only peel them back far enough to expose the screw.

5. Hold the back plate (A) steady so it will not move and pull the chassis (B) away from the back plate.

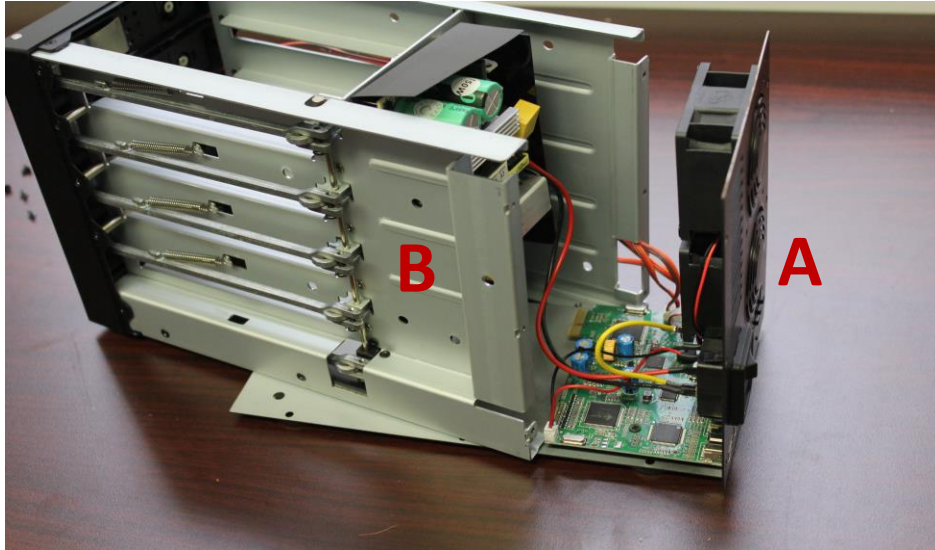


*Be sure not to strain any of the cables.

6. Unplug the fan connectors from the pcb (A) and remove the 4 screws that hold the fans onto the back plate (B).

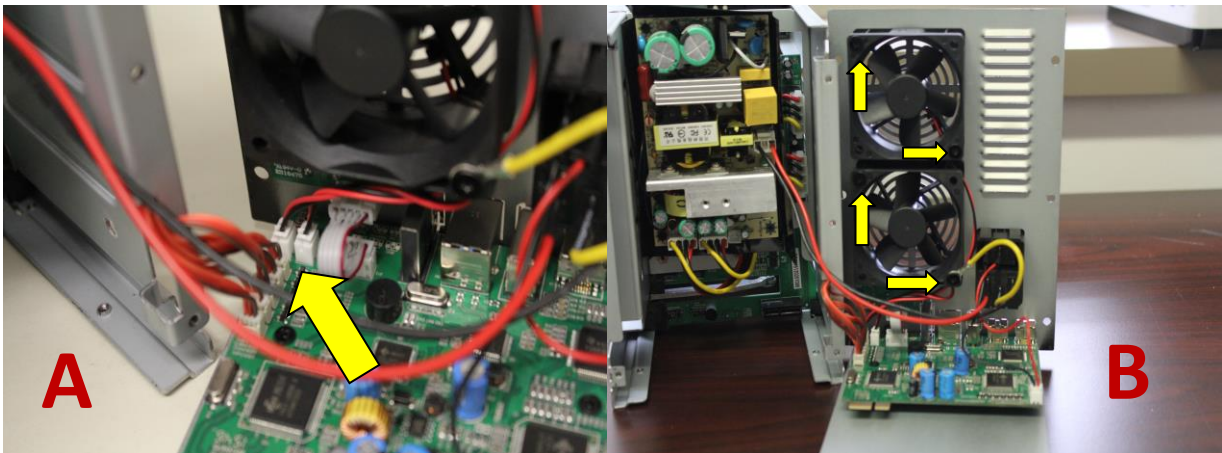

7. Place the new fans on the metal posts and screw the fan into place with the screws in the way they are pictured below, remembering to reattach the yellow ground wire (A).

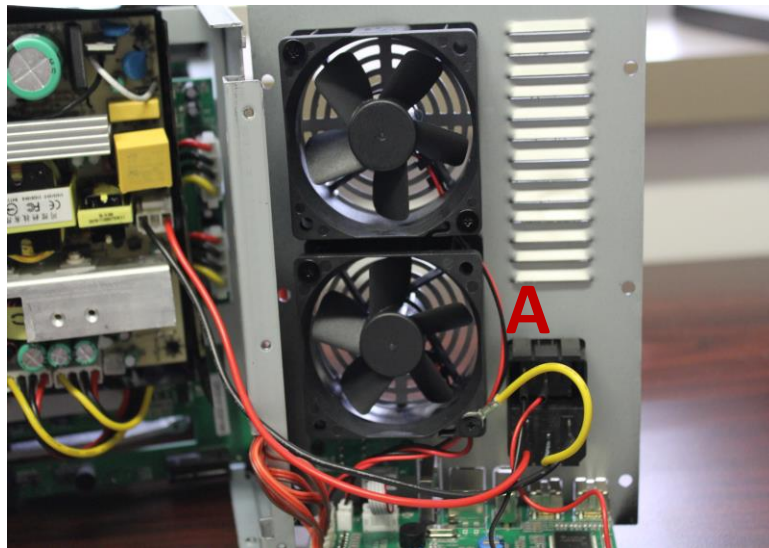

8. Follow these steps in reverse starting at step 6 to reassemble the unit.