




Novus USB-C Enclosure Installation Guide

For more information, visit our website at www.oyendigital.com

(1) Specifications

Item name:	Novus USB-C Enclosure
Supports:	2.5/3.5 inch HDD or SSD
Interface:	USB 3.1 Gen 2 (10 Gbps)
Materials:	ABS+Aluminum
Chipset:	ASMedia ASM235CM
Power:	12V / 2A
Size:	7.75 x 4.5 x 1.68 Inches
Operating Temp:	5°C ~ 55°C
System:	Windows 7/8/10/, Mac OS

(2) Detailed View

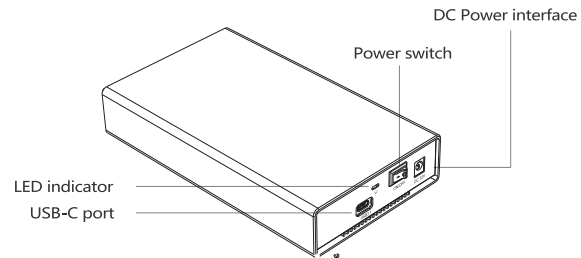

LED indicator:

Off = Power is off


Solid = Power is on

Flashing = Read/Write Access


(3) Hard Drive Assembly

a) Remove the rubber bumper from the enclosure by slowly stretching the material over each corner.

b) Remove the screw located at the bottom of the case and slide out the circuit board from the enclosure.

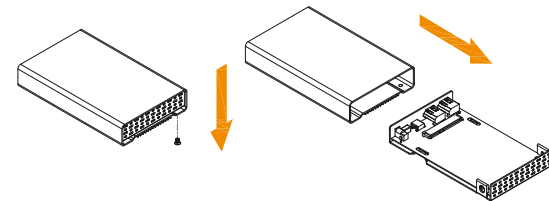


c) Install the hard drive and mount it using the included four mounting screws.

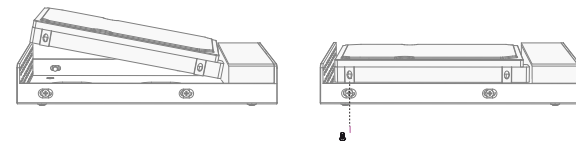


(4) Hard Drive Assembly (cont.)

d) Slide the assembled drive back into the enclosure.

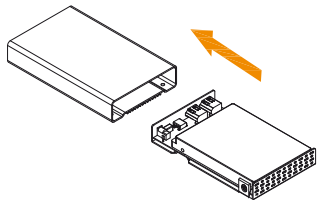

e) Fasten the 4 screws at the bottom of the housing to finish the assembly.

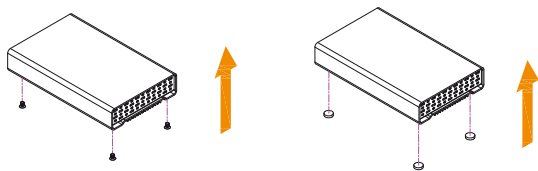

f) Insert the front end of the Novus into the rubber sleeve. Stretch the rear corners of the bumper around the Novus.

(Note: The rounded opening should be on the bottom.)

(5) System Set Up

If you have installed the drive yourself and this is a brand new drive, you will have to format the drive before it is accessible.

Use Disk Management on the PC or Disk Utility on the Mac to format the drive.

Windows: <http://oyendigital.com/windows-reformat.html>

Mac: <http://oyendigital.com/mac-reformat.html>

For the safe removal of your drive, eject the external drive from your computer first before you turn it off or disconnect it.

(6) Safety Information

Location and placing precautions

Do not cover the Novus and do not place the unit on other heat-sensitive equipment. Avoid positioning it in the following places:

- Locations with direct sunlight or other sources of heat with high temperatures (over 120° F) or high humidity (over 90%).
- Do not expose the product to water or humid conditions.

(7) Warranty Information

This product includes a three (3) year repair/replacement warranty provided by Oyen Digital. This warranty is non-transferable and is limited to the original purchaser. Warranty service may be requested by completing the form at the following link: www.oyendigital.com/rma-request-form.html

For our full warranty policy, visit oyendigital.com/warranty.html

(8) FAQ

Q: What file system should I use to format the drive?

A: This will depend on how you want to use the drive, but in general, we recommend:

- Windows 2000/XP/Vista/7/8 /10--> NTFS
- Mac OS X --> HFS+ (Mac OS Extended)
- For use with both PC and Mac --> exFAT

Q: Can I connect the Novus to a Thunderbolt 3 port?

A: Yes, the Novus is compatible with Thunderbolt 3 as well as USB 3.1 and 3.0/2.0.

Q: Is the Novus compatible with Thunderbolt 2 using a Thunderbolt 3 adapter?

A: No, the Novus is not compatible with Thunderbolt 2 using an adapter of any make or model.

For other questions, please contact info@oyendigital.com or visit the FAQ section of our website, oyendigital.com/support.html.